


# CERARIBBON®

## RIBBON COATED CERASOLZER

### Model number

102-217-160-02/30

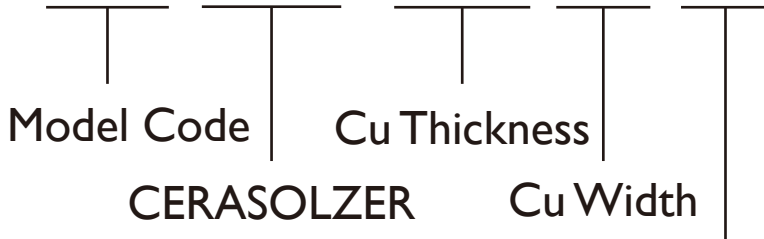

Cu Thickness 80~160  $\mu\text{m}$

Cu Width 2~6mm

Coating Thickness 30~50  $\mu\text{m}$

Coating Thickness ※Inform your request specification.

### About CERARIBBON

CERARIBBON is a Ribbon coated CERASOLZER to Copper ribbon.

### Feature


By soldering CERARIBBON to metal film substrates, such as Mo, Ag, Al and so on, or transparent conducting film substrates, such as ITO, ZnO and so on, It is possible to solder with high reliability and low ohmic contact.

### Application example

CERARIBBON can be used as extraction electrodes for photovoltaic module by soldering to metal film surface.

### Specification

Copper Species	: soft oxygen-free copper
Bobbin material	: Plastic
Size	: $\Phi$ 160mm $\times$ 114mm (std.)
Weight	: 3~5kg

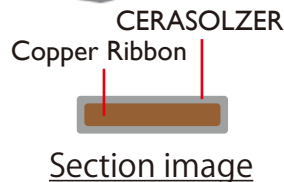

※CERASOLZER® is a special solder developed for soldering to glass, ceramics or low solderability metals.

 Soul in Technology  
**KURODA-TECHNO Co.,Ltd.**

157 Shinyosida-cho Kohoku-ku Yokohama Kanagawa, 223-0056, Japan  
Tel:+81-45-590-0078

[www.kuroda-techno.com](http://www.kuroda-techno.com)

Contents of this catalogue are subject to change without notice.

© 2011 KURODA-TECHNO All Rights Reserved

2011.03.01 C.P.